


TSX-8500: Continuous Insulation for Exterior Walls and Exposed Use Pre-Engineered Metal Building Construction Application

TSX-8500 provides a layer of continuous insulation (ci) for walls or ceilings of pre-engineered metal buildings in one easy step. The TSX-8500 is simply fastened to the face of the girts or between the girts and the metal exterior skin of the building. Use Rmax PVC clips for an easy yet clean, professional installation.

Refer to TSX-8500 data sheet for additional application/installation, compliances, thermal and physical properties, limitations and warnings.

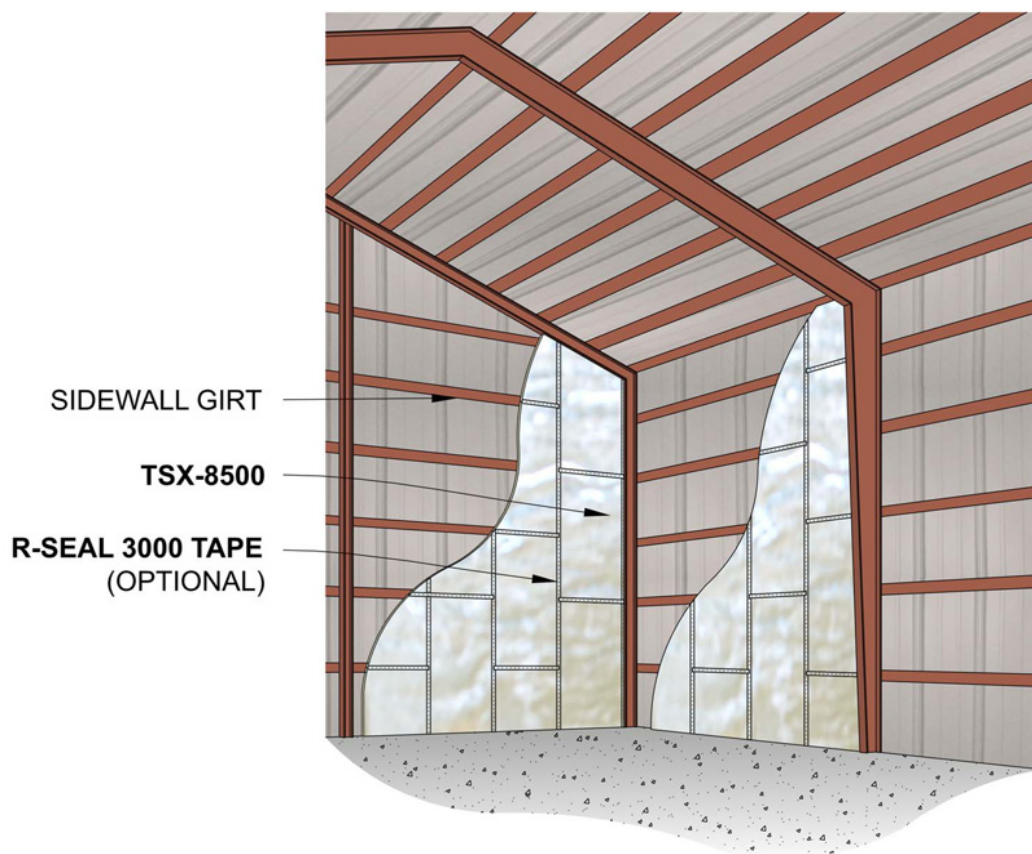

Warranty: See Rmax "Sales Policy" and "Fifteen Year Limited Thermal Warranty" for terms and conditions. Rmax does not assume any responsibility or liability for the performance of any products other than those manufactured by Rmax. **NOTE: All Rmax products must be tarped, placed on skids and kept dry before and throughout construction.**